


6245C超薄滑车剪式举升机

6245C Ultra-thin scissor lift

技术参数 Technical Data

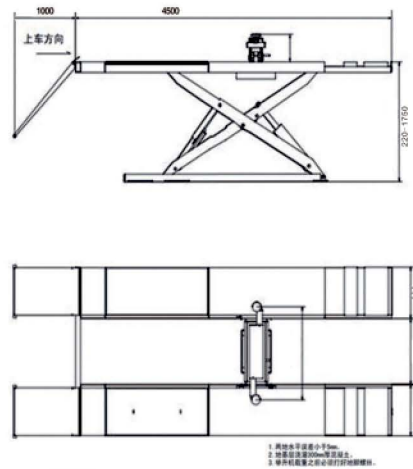

举升能力	Lifting capacity	4000KG
举升高度	Lifting height	1750mm
举升时间	Lifting time	≤60s
平台长度	Platform length	4500mm
平台宽度/总宽度	Platform Width/Overall width of paleform	630mm/2160mm
电机功率	Motor power	2.2KW/220V/380V
落地高度	Floor height	220mm
气源压力	Air supply pressure	6-8KG/cm
整机重量	Weight	2200KG/2320KG

产品特点 Product Features

超薄大剪式举升机适用于各种档次的小型汽车专业高精度四轮定位及车辆检测维修与保养。本机主要液压部件选用国际优质进口件组装而成，采用双齿、液压和电器三重保护，安全、可靠，运行同步平稳。本机由主体平板、液压系统、电气系统三个部分组成。

1. 气动解锁，安全可靠。
2. 液压系统采用先进的集成阀板油路和进口密封件。
3. 停电时亦可采用手动将汽车安全下降驶出。
4. 油缸2年质保，质保期内卸压漏油免费换新缸。
5. 动力单元采用纯铜芯电机国际知名品牌。
6. 采用隐藏剪式超薄结构，无需施工地坑，占地空间小。

Super low profile and perfect for ground mounted; Suitable for any alignment turntable. The main hydraulic components of the machine are assembled by international high quality imported parts, which is double-tooth, hydraulic and electrical triple protection, safe, reliable and stable running. This machine is composed of three parts: main body plate, hydraulic system and electrical system.

1. Electric unlock, safety and reliable.
2. Hydraulic system uses advanced integrated valve plate oil and imported seals.
3. Power failure can also be used manually to the safety of vehicles dropping out.
4. Cylinder 2-year warranty, quality assurance period of pressure relief oil free replacement cylinder.
5. Power unit using pure copper core motor international famous brands.
6. The use of hidden scissors super Low structure, no construction pit, small footprint.

QTY-6245C超薄滑车剪式举升机

QTY-6245C Ultra-thin scissor lift

● ● ● 颜色可选

 保险公司承保



电动液压滑车
ELECTRICALLY CONTROLLED
JACKING BWAMS



加粗油缸，动力更强力
USE A MORE ROBUST CYLIND IN
ORD TO ENSURE MORE
POWER AND SERVICE LIFE



滑块式轨道
PULLEY TRACK