


# 240C龙门举升机

## 240C two post lift clean floor

### 技术参数 Technical Data

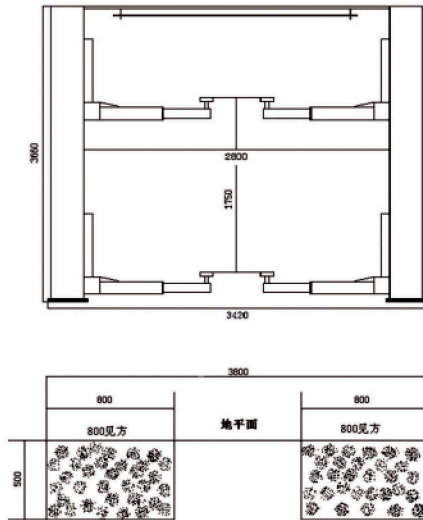

立柱高度	Overall height	3660mm
举升重量	Lifting capacity	4000KG
举升高度	Lifting height	1750mm
升降时间	Lifting time	45-60s
电压	Motor	2.2kw 220v/380v
驱动方式	Drive mode	电动液压 / Electric hydraulic
整机重量	Weight	570KG

### 产品特点 Product Features

龙门举升机是一种比较先进的汽车保养设备，主要用于4000公斤以下的各种小型汽车的快速修理及保养，替代了旧式地沟修理的缺点，具有占地小、投资少、效率高等优点，是现代汽车修理行业的理想维修设备。

1. 立柱高采用4.75mm厚钢板，立柱不扭曲，不变形，安全性能高。
2. 采用高品质油缸，油缸质保3年，质保期内泄压漏油免费换新缸。
3. 传动链条采用单根121节4×4盾牌链条，国际知名品牌，世界免检产品。
4. 动力单元采用纯铜芯电机国际知名品牌。
5. 保险锁上升时自动上锁，保证上升时的安全。
6. 双柱间有横梁连接，带限位装置，保证安全断电。

Two post lift clean floor is relatively advanced vehicle maintenance equipment, mainly used for the following small 4000 kg of various small car rapid repair and maintenance, replacing the old trench repair shortcomings, with an area of small. High efficiency, Is the modern automobile repair industry ideal maintenance equipment.

1. Column height of 4.75mm thick steel plate, column is not distorted, no deformation, high safety performance.
2. The use of high-quality fuel tank, fuel tank warranty 3 years, the warranty period of pressure relief oil free replacement cylinder.
3. Transmission chain with a single 121 4 × 4 shield chain, the international famous brands.
4. Power unit using pure copper core motor international famous brands.
5. When the insurance lock is locked, it will be locked automatically when it is ascending.
6. between the two columns with a beam connection, with a limit device to ensure safe power.


# 240C龙门举升机

## two post lift clean floor


● ● ● 颜色可选



保险公司承保

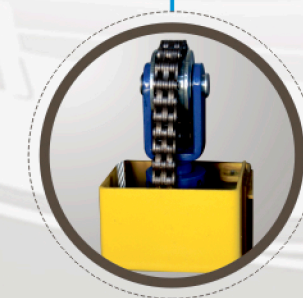

**121节4×4链条(世界免检)**  
4\*4 121 SECTING CHINA (STATE INSPECTION EXEMPTION PRODUCT)

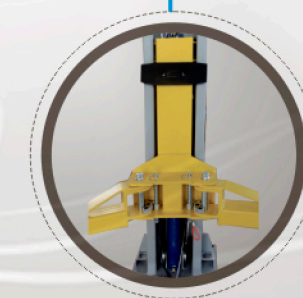

**板式结构**  
STRONG CARRIAGE AND AMR STRUCTURE



**螺旋托盘**  
ROUND SCREW-UP LIFTING PAD